

# Technic NS-450

## DESCRIPTION AND GENERAL PROPERTIES

- **Material** Neoprene and natural latex
- **Length (inches)** 16»
- **Thickness (inches)** 0.030 (30 mil)
- **Wrist** Straight cuff
- **Colour/Color** Black
- **Interior finish** Flocked
- **Exterior finish** Embossed texture
- **Size / EAN** 6 7 8 9 10 11
- **Packaging** 12 pairs/bag - 72 pairs/carton



## PERFORMANCE RESULTS

Certification category 3

CE 0334



AJKL


3121

### Legends



**MECHANICAL HAZARDS**  
EN 388

PERFORMANCE LEVELS



**LOW CHEMICAL PROTECTION**  
EN 374



**MICRO-ORGANISMS**  
EN 374




**RADIOACTIVE CONTAMINATION**  
EN 421



**HEAT AND FIRE**  
EN 407

PERFORMANCE LEVELS

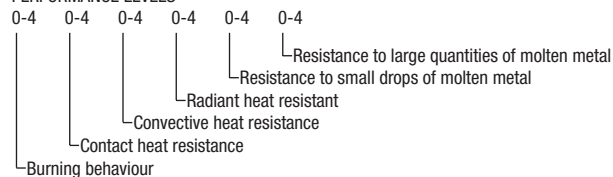


**SPECIFIC CHEMICAL PROTECTION**  
EN 374

Letter Code	Chemical product
A	Methanol
B	Acetone
C	Acetonitrile
D	Dichloromethane
E	Carbon Disulfide
F	Toluene
G	Diethylamine
H	Tetrahydrofurane
I	Ethyl acetate
J	n-Heptane
K	Sodium hydroxide 40%
L	Sulphuric acid 96%



**COLD HAZARDS**  
EN 511

PERFORMANCE LEVELS



For more details: [www.mapa-pro.com](http://www.mapa-pro.com)

**MAPA**  
PROFESSIONAL  
[www.mapa-pro.com](http://www.mapa-pro.com)

# Technic NS-450

## DESCRIPTION AND GENERAL PROPERTIES

- Freedom of movement, due to the quality of the neoprene and the comfort of the cotton flock-lining
- Embossed texture provides excellent grip
- Longer length provides forearm protection

## MAIN FIELDS OF USE

## INSTRUCTIONS FOR USE

### Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at workplace may differ from the «CE»-type tests.
- It is not recommended for persons sensitized to natural latex, thiazoles and dithiocarbamates to use these gloves.
- Put the gloves on dry, clean hands.
- Do not use the gloves in contact with a chemical for a duration in excess of the measured breakthrough time. Refer to the website [www.mapa-pro.com](http://www.mapa-pro.com) or contact the Technical Customer Service - MAPA PROFESSIONNEL ([stc.mapaspontex@mapaspontex.fr](mailto:stc.mapaspontex@mapaspontex.fr)) in order to know this breakthrough time. Use 2 pairs alternatively when in long duration contact with a solvent.
- Turn the cuff end down in order to prevent a hazardous chemical from dripping onto the arm.
- Inspect the gloves for cracks or snags before reusing them.

### Storage conditions

Store the gloves in their original packaging at a temperature not below 5°C.

### Laundering conditions

Before taking off the gloves, clean them as appropriate :

- in use with paints, pigments and inks : wipe with a clean cloth dampened with a suitable solvent, and rub over with a dry cloth
  - in use with a solvent (diluent, etc...) : rub over with a dry cloth
  - in use with acids or alkalis : thoroughly rinse the gloves under running water, and rub over with a dry cloth
- Caution : improper use of the gloves or submitting them to a cleaning or laundering process which is not specifically recommended can alter their performance levels.

### Drying conditions

Ensure the inside of the gloves is dry before putting them on again.

### Food contact US

FDA 21CFR 177.2600

## LEGISLATION

This product is not classified as hazardous according to the directive 1999/45/EC of the European Parliament and of the Council.

This product does not contain any substances of very high concern according to the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- CE-Type Examination Certificate  
0072/014/162/05/94/10514/Ex02 05 94

- Issued by the notified body nr  
0072

I.F.T.H. – Av. Guy de Collongue - F-69134 ECULLY CEDEX

- Quality assurance certificat  
0334 Asqual 14 rue des Reculettes -F-75013 PARIS

**MAPA**<sup>®</sup>  
PROFESSIONAL  
[www.mapa-pro.com](http://www.mapa-pro.com)