

Ultrane Performance 562

DESCRIPTION AND GENERAL PROPERTIES

- **Material** Nitrile
- **Length (inches)** 8.25-10.24 (depending on size)
- **Wrist** Knitted wrist
- **Colour/Color** Black
- **Interior finish** Seamless textile support
- **Exterior finish** Dots
- **Size / EAN** 8 9 10
- **Packaging** 10 pairs/bag - 100 pairs/carton
- **Complementary information** Guaranteed without DMF



PERFORMANCE RESULTS

Certification category 2




4121

Legends



MECHANICAL HAZARDS
EN 388

PERFORMANCE LEVELS



LOW CHEMICAL PROTECTION
EN 374



MICRO-ORGANISMS
EN 374




RADIOACTIVE CONTAMINATION
EN 421



HEAT AND FIRE
EN 407

PERFORMANCE LEVELS

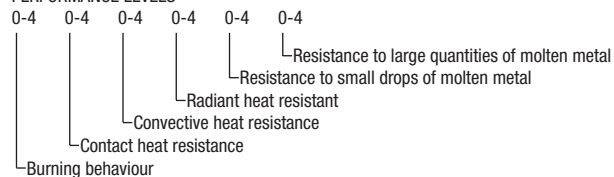


SPECIFIC CHEMICAL PROTECTION
EN 374

Letter Code	Chemical product
A	Methanol
B	Acetone
C	Acetonitrile
D	Dichloromethane
E	Carbon Disulfide
F	Toluene
G	Diethylamine
H	Tetrahydrofurane
I	Ethyl acetate
J	n-Heptane
K	Sodium hydroxide 40%
L	Sulphuric acid 96%



COLD HAZARDS
EN 511

PERFORMANCE LEVELS



For more details: www.mapa-pro.com

MAPA
PROFESSIONAL
www.mapa-pro.com

Ultrane Performance 562

DESCRIPTION AND GENERAL PROPERTIES

- Excellent abrasion resistance: longer-lasting
- Nitrile coating resistant to dirt particles
- Excellent tactile sensitivity and freedom of movement, due to the reduced thickness of the glove
- Back partially coated for improved protection

MAIN FIELDS OF USE

Automotive/mechanical industry

- [Sorting small parts](#)
- Screwing and bolting
- Pump manufacturing
- Precision assembly
- Metal part assembly

Other industries

- [Packaging](#)
- Minor maintenance Tasks
- Light handling in storage areas

INSTRUCTIONS FOR USE

Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use in the workplace may differ from the tests performed in the laboratory.
- It is not recommended for persons sensitised to natural rubber latex or dithiocarbamates to use these gloves.
- Put the gloves on dry, clean hands.
- Rub over the gloves with a clean cloth before taking them off.
- Check the gloves for cracks or snags before reusing them.

Storage conditions

Store the gloves in their original packaging protected from heat, light and humidity.

Laundering conditions

Caution : improper use of the gloves or submitting them to a cleaning or laundering process that is not specifically recommended can alter their performance levels.

Drying conditions

Ensure the inside of the gloves is dry before putting them on again.

LEGISLATION

This product is not classified as hazardous according to the directive 1999/45/EC of the European Parliament and of the Council.

This product does not contain any substances of very high concern according to the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- CE-Type Examination Certificate
0075/014/162/05/04/0073 Ex 01/05/04
 - Issued by the notified body nr
0075
- C.T.C – F-69367 LYON CEDEX 07